


## PMC487

### Audio PMC card

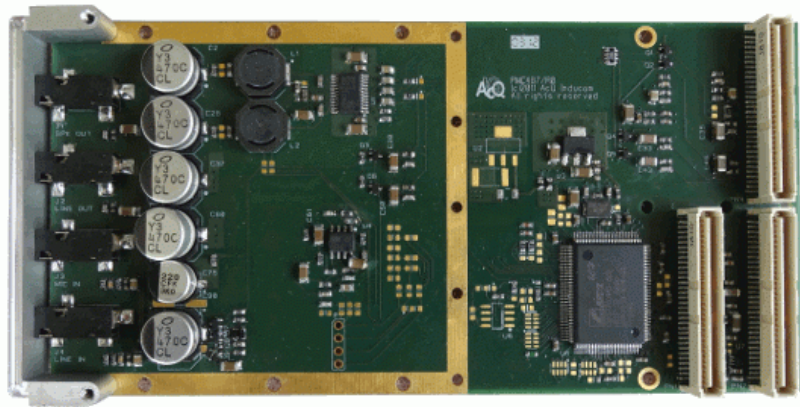

An 8 channel PMC audio card with front and rear I/O for use in embedded computer applications based on the Cmedia CMI8768. This is a single-chip PCI audio controller with integrated codec, full duplex 8 channel DAC and 2 channel ADC, 96k/16bit playback and 48k/16bit recording support.

The Integrated SPDIF transmitter can deliver 5.1 Dolby® Digital/DTS®, or 6.1/7.1 Dolby® Digital Surround EX/DTS ES soundtracks and up-to-96kHz high-definition audio stream to an external receiver.

The audio interfaces via the PMC487 front panel consist of a line input, a microphone input, a front line output and a speaker output with an on-board stereo amplifier; all using 3.5mm stereo connectors.

Optionally the audio connections can be made via the rear I/O of the PMC487 using the PIM481-J (PMC I/O Module, with four 3.5mm stereo connectors) or the PIM481-DSUB (PMC I/O Module, with 15-pin DSUB connector). The PIM481-J and PIM481-DSUB are to be mounted on a rear transition module. Both the front and rear I/O of the PMC487 are compatible with the PMC481 audio card.

A special PIM with SPDIF interface is available for the PMC487. More PIM modules may become available in the future.

The PMC487 is available in temperature range -20 .. +70°C.

Driver support for the Cmedia CMI8768-series are included in commonly used operating systems, like Windows, Linux and VxWorks.

#### Features:

- > Single slot PMC (IEEE 1386.1-2001) with front I/O and rear I/O
- > PCI interface rev.2.2, 33MHz, 32-bit, supports 3.3V and 5V signalling
- > Optional PIM (VITA 36) for rear I/O connections
- > Cmedia CMI8768 8 channel PCI integrated sound chip
- > Four audio connections via front panel
- > Front or rear line out selectable by solder jumper to speaker output
- > Driver support available in commonly used operating systems

## PCI bus compliance

- \* PMC specification IEEE Std 1386.1-2001
- \* PCI specification 2.2 compliant
- \* 5V and 3.3V signalling voltage (V/I/O) supported
- \* 33MHz, 32-bit PCI databus
- \* Uses 5V and 12V power supply

## Audio chipset

- \* Cmedia CMI8768
- \* 8CH single sound chip with embedded codec
- \* Full-duplex 8CH DAC/2CH ADC
- \* Supports 96k/16bit playback and 48k/16bit recording
- \* Signal-to-Noise Ratio (SNR) typical 100dB
- \* Integrated S/PDIF transmitter supports 44.1kHz/48kHz/(96 kHz\*) sample-rate, 16bit resolution
- \* Built-in earphone buffer at front-out channel (32Ohm load)
- \* DirectSound™ 3 HW acceleration compliant
- \* ACPI compliant power down management
- \* (\*) only available in supported drivers

## Audio interfaces

- \* Line out front (stereo)
- \* Speaker out (stereo 4-8 ohm) with on-board amplifier, selected by solder jumper
- \* Line out rear (stereo) (only through rear I/O with appropriate PIM)
- \* Line out surround (stereo) (only through rear I/O with appropriate PIM)
- \* Line out center + bass (only through rear I/O with appropriate PIM)
- \* Line in (stereo)
- \* Aux in (stereo) (only through rear I/O with appropriate PIM)
- \* Microphone in (mono) with phantom power supply
- \* SPDIF in/out(only through rear I/O with appropriate PIM)
- \* Speaker in (PC Beep) (only through rear I/O with appropriate PIM)

## Speaker output amplifier


- \* Efficient class-D operation
- \* Output power:
  - \* 2 W / channel @ 8 ohm load \*
  - \* 3.5 W / channel @ 4 ohm load \*
- \* Single-ended outputs
- \* THD+N typical 0.04% (1 kHz, 5W)
- \* SNR typical 92 dB \*
- \* First order high-pass output filter: 40Hz (-3dB) @ 8 ohm load
- \* Thermal and short-circuit protection with auto recovery
- \* (\*) see manual for details and current limiting

## Environmental

- \* Operating temperature of components: -20 .. +70°C (extended).
- \* Storage temperature: -40 to +85°C
- \* Humidity: 10% to 90% relative humidity for operating and storage
- \* RoHS compliant

## Ordering information

- \* **PMC487/T01** 8-channel high performance PMC audio card with front and rear I/O, extended operating temperature range -20 to +70°C
- \* **PIM481-J/T01** PMC I/O Module with four 3.5mm audio jacks for rear I/O
- \* **PIM481-DSUB/T01** PMC I/O Module with DSUB for rear I/O
- \* **PIM487-SPDIF/T01** PMC I/O Module with SPDIF interface

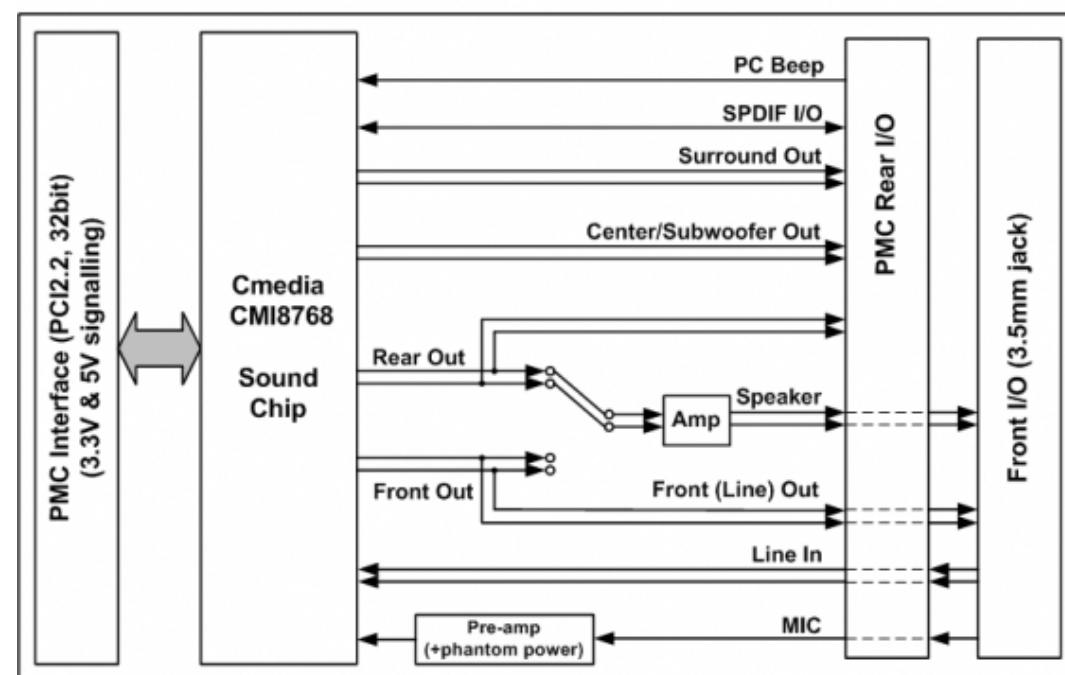

AcQ International BV  
Alanenweg 6  
5342 PV OSS  
The Netherlands

Phone +31 (0)412 64 19 22  
Internet [www.acq.nl](http://www.acq.nl)  
E-mail [info@acq.nl](mailto:info@acq.nl)

pmc487\_v9\_ds